




EASY TO INSTALL
Plug And play solution



ECONOMIC SAVING
High efficiency single-phase motor



EASY TO USE
Equipped with programmable logic, the product allows programming thanks to the simple and intuitive display.

Self-priming swimming pool pumps
boosting system
with integrated control

Construction

Self-priming swimming pool pumps with built-in strainer and motor insulated from pumped water.

The pump is made with high quality plastic materials, corrosion and sand erosion resistant.

With stainless steel diffuser.

Base-plate kit.

Applications

For water circulation in swimming pool filtration systems.

For clean or slightly dirty water with solids in suspension.

Operating conditions

Liquid temperature from 0 °C to +40 °C.

Ambient temperature up to 40° C.

Maximum permissible pressure in the pump casing 2,5 bar.

Continuous duty.

Motor

2-pole induction motor.

Nominal speed 3970 rpm

- Motor: variable speed

Frequency: 50-60 Hz

Single-phase 220-240V~50Hz/220V~60Hz, with thermal protector.

H07RN-F cable, 3G1.5 mm², length 1.5 m, with CEI-UNEL 47166 plug.

Insulation class F.

Protection IP X4.

Constructed in accordance with EN 60034-1, EN 60335-1, EN 60335-2-41.

Features

- integrated frequency converter
- high efficiency asynchronous motor
- motor power control
- voltage and current control
- monitoring of maximum starting current

Protections

- dry-run protection
- detects the presence of air in the pump casing
- overload control and overheating motor control
- pump blockage
- power supply control
- starts per hour control
- detects small leakages in the system

Designation

Example: I-MPCM 31

I = Version with integrated frequency converter

MPC = Series

M = Singlephase version (no indication: threephase)

31 = Pump type

Materials

Components	Materials
Pump casing	Noryl PPO-GF30
Diffuser cover	Noryl PPO-GF30
Impeller	Noryl PPO-GF30
Strainer cover	Lexan
Strainer basket	Polypropylene
Diffuser funnel and wear-ring	Steel 1.4401 EN 10088 (AISI 316)
Mechanical seal	Carbon - Ceramic - FPM

Performance

Single-phase


			Q = Flow									
			m³/h	0	2	4	6	8	10	12	14	16
Model	230V	P1	l/min		33,3	66,6	100	133	167	200	233	267
	A	kW	H (m) = Total head									
I-MPCM 31	4,6	1,05		15,6	15,6	15,2	14,4	13,4	11,9	10,2	8,1	5,6

P1: Maximum power input.

H: Total head in m

Tolerances according to UNI EN ISO 9906:2012

Characteristic curves

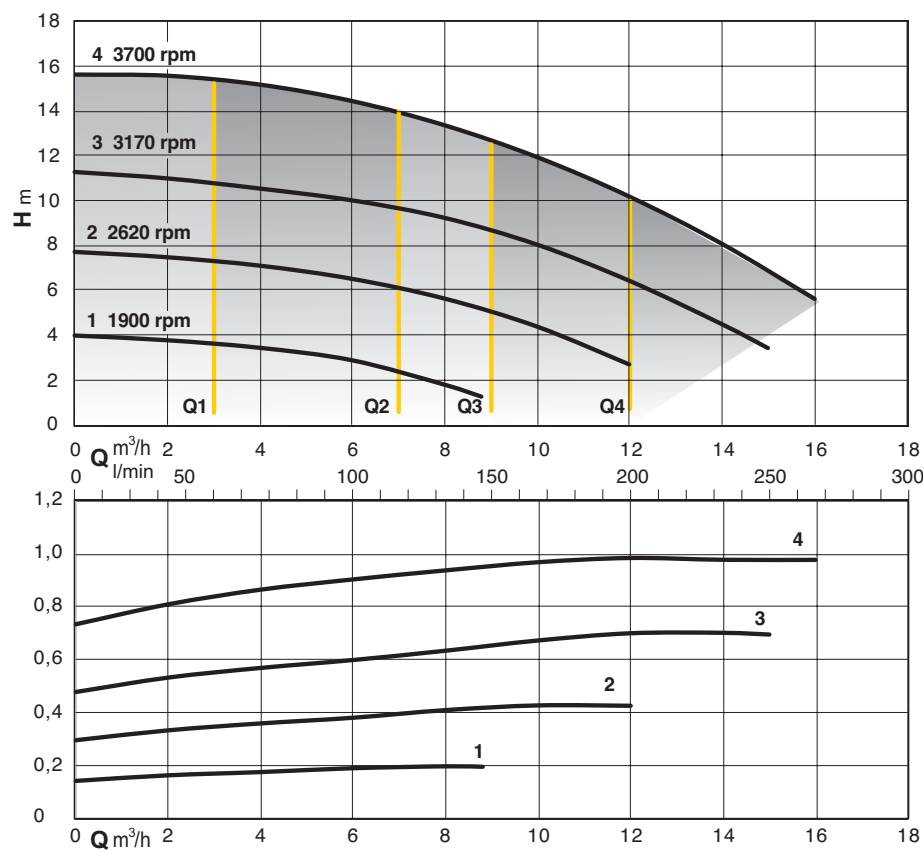

Constant flow mode


Q1 - Q2 - Q3 - Q4
In this mode, the system keeps the preset flow rate constant as the pressure required by the system varies.



Programmable Speed Mode

1 - 2 - 3 - 4
In this mode, by changing the working frequency, it is possible to choose one of the 4 utilization curves included within the working range.

Dimensions and weights

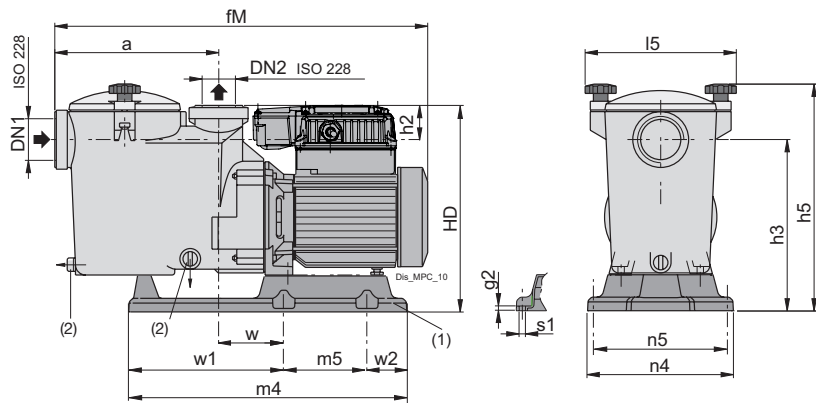

TYPE			mm																kg
	DN1	DN2	a	fM	g2	h2	h3	h5	HD	l5	m4	m5	n4	n5	s1	w	w1	w2	Weight
I-MPCM 31	G2	G1 1/2	235	546	7	50	243	323	293	215	410	123	215	197	9	100	128.5	158.5	12.7

Control Panel



They allow to visualize:

- Initial screen (rUn, OFF, StB, Err)
- Motor Operating Frequency
- Supply current input
- Supply electrical power input
- Supply voltage

Features

Strong transparent Lexan strainer cover
 Strong Noryl pump casing
 Large capacity strainer basket
 Stainless steel AISI 316 wear-ring diffuser-funnel, for extra reliability
 Diffuser with peripheral-longitudinal flow, for a quicker self-priming

