



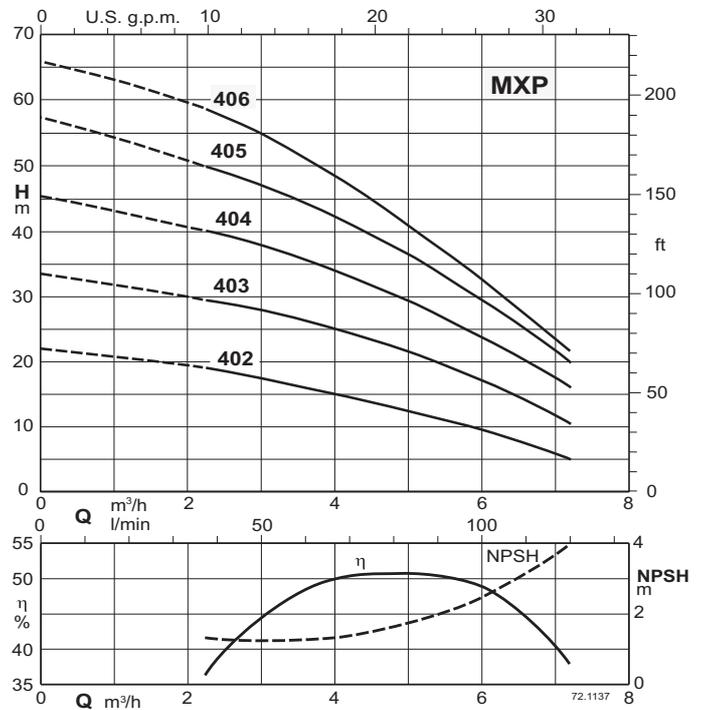

Characteristic curves $n \approx 2800$ 1/min

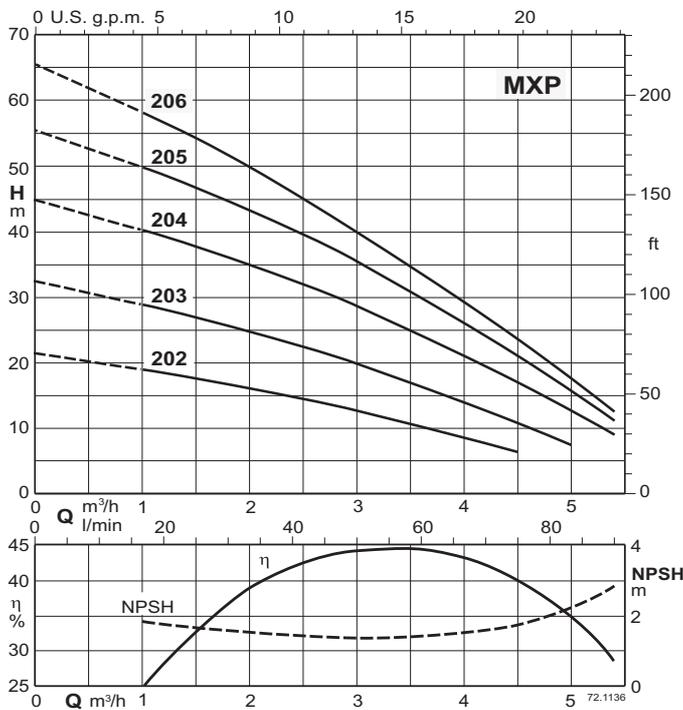

Horizontal multi-stage close coupled pumps

Construction

Horizontal Multi-Stage Close Coupled Pumps
One-piece chrome-nickel stainless steel pump body, open on one side (barrel casing), with front suction port above the pump axis and radial delivery port at the top.
Stages in Noryl.

Applications

For water supply systems.
For domestic use, for garden use and irrigation.

Operating conditions

Liquid temperature: 0 °C to +50 °C.
Ambient temperature up to 40° C.
Maximum permissible pressure in the pump casing: 8 bar.
Continuous duty.

Motor

2-pole induction motor, 50 Hz ($n \approx 2800$ 1/min).
MXP: three-phase 230/400 V \pm 10%.
MXPM: single-phase 230 V \pm 10%, with thermal protector.
Capacitor inside the terminal box.
Insulation class F.
Protection IP 54.
Motor set up for operation with 1.1 kW inverter.
IE2 efficiency class for single-phase motors.
IE3 efficiency class for three-phase motors (IE2 up to 0,65 kW).
Constructed in accordance with EN 60034-1; EN 60034-30-1.
EN 60335-1, EN 60335-2-41.

Special features on request

Other voltages.
Frequency 60 Hz (as per 60 Hz data sheet).
Motor suitable for operation with frequency converter up to 0,75 kW.

Designation

Example: MXP 206/B
MXP = Series
2 = Rated flow in m³/h
06 = Number of impellers
/B = It refers to a revision

Materials

Components	Material
Pump casing	Chrome-nickel steel 1.4301 EN 10088 (AISI 304)
Casing cover	Chrome-nickel steel 1.4301 EN 10088 (AISI 304)
Pump shaft	Steel 1.4104 EN 10088 (AISI 430F)
Plug	Chrome-nickel steel 1.4305 EN 10088 (AISI 303)
Stage casing	PPO-GF20 (Noryl)
Impeller	PPO-GF20 (Noryl)
Mechanical seal	Carbon - Ceramic - NBR

Performance $n \approx 2800$ rpm

Three-phase

Model	230V		400V		Q = Flow										
	A	kW	HP	P2	m ³ /h	H (m) = Total head									
					l/min	0	1	1,5	2	2,5	3	3,5	4	4,5	5
MXP 202	1,7	1	0,25	0,34	21,5	19	17,5	16	14,5	12,5	10,5	8,5	6,5	-	-
MXP 203	2,4	1,4	0,37	0,5	32,5	29	27	25	22,5	20	17	14	11	7,5	-
MXP 204/A	2,8	1,6	0,55	0,75	45	40	37,5	35	32	28,5	25	21,5	17	13	9
MXP 205/A	3,5	2	0,75	1	56	50	46,5	43,5	40	35,5	31	26,5	21	16	11
MXP 206	3,5	2	0,75	1	65,6	58,1	54,2	49,7	44,9	39,7	34,5	29	23,4	17,3	12,3

Single-phase

Model	230V		P2		Q = Flow										
	A	kW	HP	P1	m ³ /h	H (m) = Total head									
					l/min	0	1	1,5	2	2,5	3	3,5	4	4,5	5
MXPM 202	2,3	0,25	0,34	0,42	21,5	19	17,5	16	14,5	12,5	10,5	8,5	6,5	-	-
MXPM 203	3	0,37	0,5	0,57	32,5	29	27	25	22,5	20	17	14	11	7,5	-
MXPM 204/A	4,5	0,55	0,75	0,78	45	40	37,5	35	32	28,5	25	21,5	17	13	9
MXPM 205	5,7	0,75	1	1,01	56	50	46,5	43,5	40	35,5	31	26,5	21	16	11
MXPM 206	5,7	0,75	1	1,01	65,6	58,1	54,2	49,7	44,9	39,7	34,5	29	23,4	17,3	12,3

Three-phase

Model	Voltage		P2		Q = Flow									
	230V	400V	kW	HP	m³/h	0	2,25	3	3,5	4	4,5	5	6	7,2
	A						l/min	37,5	50	58,3	66,6	75	83,3	100
					H (m) = Total head									
MXP 402	2,4	1,4	0,37	0,5	22	19	17,5	16,5	15	14	12,5	9,5	5	
MXP 403/A	2,8	1,6	0,55	0,75	33,5	30	28	26,5	25	23	21,5	17	10	
MXP 404/B	3,5	2	0,75	1	46	40	38	36,5	34	32	29,5	24	16	
MXP 405	4,5	2,6	1,1	1,5	56	50	47	45	42	39,5	36	29,5	20	
MXP 406	4,5	2,6	1,1	1,5	65,9	58,5	54,6	51,5	48,2	44,6	40,7	32,4	21,4	

Single-phase

Model	Voltage		P2		P1	Q = Flow									
	230V	P2		kW		m³/h	0	2,25	3	3,5	4	4,5	5	6	7,2
	A	kW	HP		l/min			37,5	50	58,3	66,6	75	83,3	100	120
					H (m) = Total head										
MXPM 402	3	0,37	0,5	0,57	22	19	17,5	16,5	15	14	12,5	9,5	5		
MXPM 403/A	4,5	0,55	0,75	0,78	33,5	30	28	26,5	25	23	21,5	17	10		
MXPM 404/A	5,7	0,75	1	1,01	46	40	38	36,5	34	32	29,5	24	16		
MXPM 405	7	1,1	1,5	1,44	56	50	47	45	42	39,5	36	29,5	20		
MXPM 406	7,4	1,1	1,5	1,44	65,9	58,5	54,6	51,5	48,2	44,6	40,7	32,4	21,4		

P1: Maximum power input.

P2: Rated motor power output.


Tolerances according to UNI EN ISO 9906:2012

A safety margin of + 0.5 m is recommended for the NPSH value.

For flow rates greater than 4 m³/h use a G1 1/4 suction pipe (DN 32).

Test results with clean cold water, without gas content.

Dimensions and weights

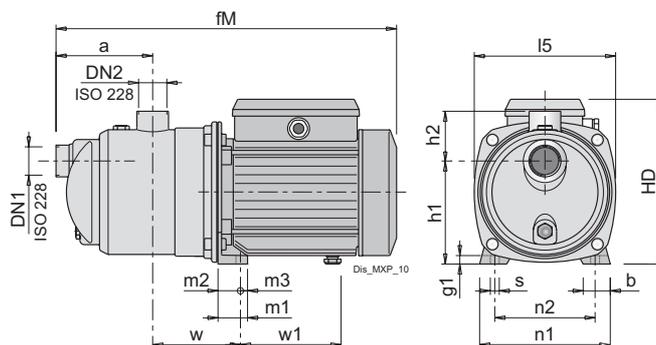

TYPE	DN		mm															kg	
	DN1	DN2	a	b	fM	g1	h1	h2	HD	l5	m1	m2	m3	n1	n2	s	w	w1	Weight
MXP 202	G 1	G 1	115	30	362	10	116	61	176	161	33	25	8	146	112	9	95	102	5.9
MXP 203	G 1	G 1	115	30	362	10	116	61	176	161	33	25	8	146	112	9	95	102	6.7
MXP 204/A	G 1	G 1	115	30	391	10	116	61	192	161	33	25	8	146	112	9	95	112	8.9
MXP 205/A	G 1	G 1	115	30	391	10	116	61	192	161	33	25	8	146	112	9	95	112	10.9
MXP 206	G 1¼	G 1	140	33	462	11	152	68	225	213.5	37.5	28	9.5	185	155	9.5	113	147	13.3
MXP 402	G 1	G 1	115	30	362	10	116	61	176	161	33	25	8	146	112	9	95	102	6.7
MXP 403/A	G 1	G 1	115	30	391	10	116	61	192	161	33	25	8	146	112	9	95	112	8.8
MXP 404/B	G 1	G 1	115	30	391	10	116	61	192	161	33	25	8	146	112	9	95	112	10.8
MXP 405	G 1	G 1	115	30	421	10	116	61	192	161	33	25	8	146	112	9	95	142	12.8
MXP 406	G 1¼	G 1	140	33	488.5	11	152	68	240	213.5	37.5	28	9.5	185	155	9.5	113	157.5	15.7

TYPE	DN		mm															kg	
	DN1	DN2	a	b	fM	g1	h1	h2	HD	l5	m1	m2	m3	n1	n2	s	w	w1	Weight
MXPM 202	G 1	G 1	115	30	362	10	116	61	176	161	33	25	8	146	112	9	95	102	6
MXPM 203	G 1	G 1	115	30	362	10	116	61	176	161	33	25	8	146	112	9	95	102	6.6
MXPM 204/A	G 1	G 1	115	30	391	10	116	61	192	161	33	25	8	146	112	9	95	112	9.9
MXPM 205	G 1	G 1	115	30	391	10	116	61	192	161	33	25	8	146	112	9	95	112	11.1
MXPM 206	G 1¼	G 1	140	33	462	11	152	68	225	213.5	37.5	28	9.5	185	155	9.5	113	147	12.8
MXPM 402	G 1	G 1	115	30	362	10	116	61	176	161	33	25	8	146	112	9	95	102	6.6
MXPM 403/A	G 1	G 1	115	30	391	10	116	61	192	161	33	25	8	146	112	9	95	112	9.8
MXPM 404/A	G 1	G 1	115	30	391	10	116	61	192	161	33	25	8	146	112	9	95	112	10
MXPM 405	G 1	G 1	115	30	421	10	116	61	192	161	33	25	8	146	112	9	95	142	12.8
MXPM 406	G 1¼	G 1	140	33	488.5	11	152	68	240	213.5	37.5	28	9.5	185	155	9.5	113	157.5	17.1